



# KNAUF

## CONTUR

DEMOUNTABLE ACOUSTIC CEILING

- ✓ Uniform, demountable surface
- ✓ Space-saving installation
- ✓ Ideal for renovation projects and open spaces
- ✓ Sustainable

### FEATURES

- T-grid ceiling
- Edge D design
- Concealed grid
- Installation from below the T-grid
- Installation depth down to 63mm

### SUSTAINABLE PRODUCT:

- Made from gypsum
- Recyclable
- Improved indoor climate
- Repaintable without loss of acoustics








**Build for the world we live in**

# CONTUR

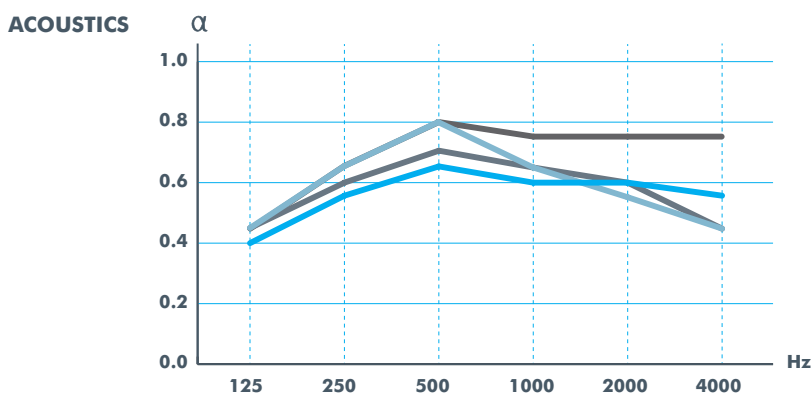
DEMOUNTABLE ACOUSTIC CEILING



## PRODUCT VARIANTS

<b>EDGE DESIGN</b>	 <p><b>EDGE D</b> Concealed grid. Non-perforated border around the edge of the tile</p>			
<b>PERFORATION DESIGN</b> Also available without perforations (plain)				
<b>PERFORATION MEASURES</b>	<b>MICRO</b> Square 3x3 mm c/c 8.33 mm	<b>GLOBE</b> Circles Ø 6 mm c/c 15 mm	<b>QUADRIL</b> Square 12x12 mm c/c 30 mm	<b>TANGENT</b> Obround 4x14 mm c/c 10/20 mm
<b>PERFORATION %</b>	10.2%	10.2%	13%	21.3%
<b>NRC @200mm</b> No mineral wool	0.60	0.65	0.65	0.75
<b>ALPHA-W @200mm</b> No mineral wool	0.65	0.60	0.60	0.80
<b>LIGHT REFLECTION</b>	72.1%	72.8%	75.1%	70.9%
<b>SIZES mm</b>	600x600x12.5			
<b>TILE WEIGHT kg/m<sup>2</sup></b>	9.45 - 10.20			
<b>SURFACE TREATMENT</b>	Front: White acrylic paint, RAL 9003, gloss 5. Back: Acoustic felt backing. Galvanised metal clips. Available in other colours on request.			
<b>SYSTEM COMPONENTS</b>	1) Gypsum ceiling tile 2) T24/38 main runner 3) Spacer bar 4) Hanger			
<b>CERTIFICATES</b>	1) Environmental product declaration 2) Danish Indoor Climate Labelling 3) ISO 16000-9 Emission of VOCs 4) UL-listed in accordance to R26164			

## PRODUCT PERFORMANCE



### FIRE CLASSIFICATION

A2-s1, d0

### AIR QUALITY

Indoor value: 10 days  
Particle emission: LOW  
Active air purification with Cleaneo technology

### AMBIENT CONDITIONS

Can withstand:  
- Constant RH 70% and 25°C  
- Ambient temperatures of up to 50°C.

### LOAD-BEARING CAPACITY

Up to 1 kg per tile (at max. 2mm deflection)

### ROBUSTNESS

Glass fibre reinforced gypsum. High pressure resistance. Highly stable ceiling ensured by tile density.

	125	250	500	1000	2000	4000
<b>MICRO</b>	0.40	0.55	0.65	0.60	0.60	0.55
<b>GLOBE</b>	0.45	0.65	0.80	0.65	0.55	0.45
<b>QUADRIL</b>	0.45	0.60	0.70	0.65	0.60	0.45
<b>TANGENT</b>	0.45	0.65	0.80	0.75	0.75	0.75

**CONSTRUCTION** 200 mm suspension, no mineral wool

For more information please contact your Knauf representative, or for a webchat with our technical team, please visit [www.knauf.co.uk](http://www.knauf.co.uk)