

Product Data Sheet

Knauf Wafer Head Self Tapping Screw



Knauf Wafer Head Self Tapping Screw is a self tapping, low profile wafer head screw for metal to metal fixing up to 0.7mm gauge.

Areas of Application

- Metal to metal fixing
- Plasterboard tracks and ceiling track systems

Key Benefits

- Black phosphate coated
- Deep, stick fit, PH recess, reduces drop or misaligned screws.
- Low torque installation PH 2 head
- Carbon steel

Compliance Standards

EN 14566: 2009 & A1 2009

Performance Data

Thickness (mm)	Reaction to Fire (R2F)	Shear Capacity (V ult, Rk)	Tensile Capacity (F ult, Rk)	Flexural Strength
4.2	A1	6,100N	9,500N	Pass

Technical information

Dimensions				
Thickness (mm)	Length (mm)	Coating Type	Material Grade	Material Number
4.2	13	Black Phosphate	AISI C1022	258323

Sustainability

Recyclability

Fully recyclable

Storage and Handling

Store in dry conditions.

Disposal/Repair

Disposal should be in accordance with local authority requirements.

Application / Installation


Designed for fixing metal to metal substrates.

Do not use impact guns, over torquing will break or damage screw, heads and threads

Additional Documentation

[Declaration of Performance UKCA](#)

[Declaration of Performance CE](#)

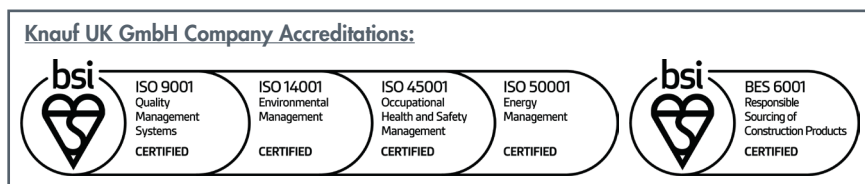

Customer Service

UK Tel: 0800 521 050
Eire Tel: 01 4620739
Email: cservice@knauf.com

Technical Service

0800 521050 (option 2)
Live Webchat 09:00 -17:00
technical-uk@knauf.com

Website

www.knauf.co.uk
www.knauf.ie

Address

Knauf
Kemsley Fields Business Park
Sittingbourne
Kent ME9 8SR

KML100499

The information given in this publication is believed to be current and accurate as at the date of publication, but no warranty, express or implied is given. Updates will not be automatically issued.

© Copyright Knauf 2023

Creation Date: 08/06/2023
Revision Reference: 001
Revision Date: 08/06/2023