

Key Characteristics

Paste-like ready-to-use finishing coat
manufactured to EN 15824

Ready-mixed

Weather resistant

Highly vapour permeable

Water-repellent

24 months shelf life

Knauf TS Mix can be added for cold/wet weather

Available both white and coloured – over 200
colours available

Other finishes available in the Knauf Render range:

Knauf MineralAktiv is a ready-mixed,
biocide-free top coat formulated for advanced
protection against algae and fungi.

Knauf Butz is a ready-to-use, coloured stone
render. It has been developed for surface design
on areas subject to greater wear and tear such
as plinth surfaces, around door entrances and
windows.

Knauf Presto is a lime-cement scratch render
and is available in 1.5mm grain size and a
range of colours.

KML100207

Speak to one of our dedicated Exteriors Sales and
Technical Team members for more information on
the product and for our sample service.

Or visit: www.knauf.co.uk

Customer Service

UK Tel: 0800 032 6283
Eire Tel: 01 4620739
Email: orders@knauf.co.uk

Technical Service

UK Tel: 0800 030 4135
Eire Tel: 01 4620739
Email: technical@knauf.co.uk

Literature

UK Tel: 03700 613 700
Eire Tel: +44 3700 613 700

Website

www.knauf.co.uk
www.knauf.ie

Knauf
Kemsley Fields Business Park
Sittingbourne
Kent ME9 8SR

Knauf
87 Broomhill Road
Tallaght
Dublin 24



When you have finished with
this document please recycle it



This document is printed
on 80% recycled paper

The information given in this publication is believed to be current and accurate as at
the date of publication, but no warranty, express or implied is given. Updates will not
be automatically issued. © Copyright Knauf 2019

KNAUF

Knauf Addi S and Conni S Top Coat Finishes



Through colour finish

Flexible and easy to apply

Textured structure

Suitable both for new buildings and
refurbishment

Build for the world we live in

Product Information

Knauf Addi S is a ready-mixed organic-based thin coat finish offering excellent colour longevity. It is part of Knauf Warm Wall and Knauf Render Only systems. It is available in more than 200 different colours.

Knauf Conni S is a ready-mixed silicone-based texture finish which is suitable for use in most coastal areas. It is a robust, flexible and reliable top coat, available in a range of grain sizes and a vast range of colours.




Application	Grain size mm	Consumption approx. kg/m ²	Yield approx. m ² /bucket
Addi S 1.5	1.5	2.2	11.4
Conni S 1.0	1.0	1.6	15.6
Conni S 1.5	1.5	2.2	11.4
Conni S 2.0	2.0	2.8	8.9
Conni S 3.0	3.0	3.7	3.8

Knauf Render Systems

Knauf offers several dual coat render systems, including Warm Wall and Render Only. The illustration below is the Knauf Warm Wall System, incorporating EPS insulation. Mineral Fibre insulation can also be used.

The Knauf Render Only system is applied without the external insulation, directly onto the substrate, e.g. Knauf AQUAPANEL® Cement Board Outdoor. The build-up of Basecoat, Reinforcing Mesh, Basecoat, Primer and Top Coat is consistent across all dual coat systems.

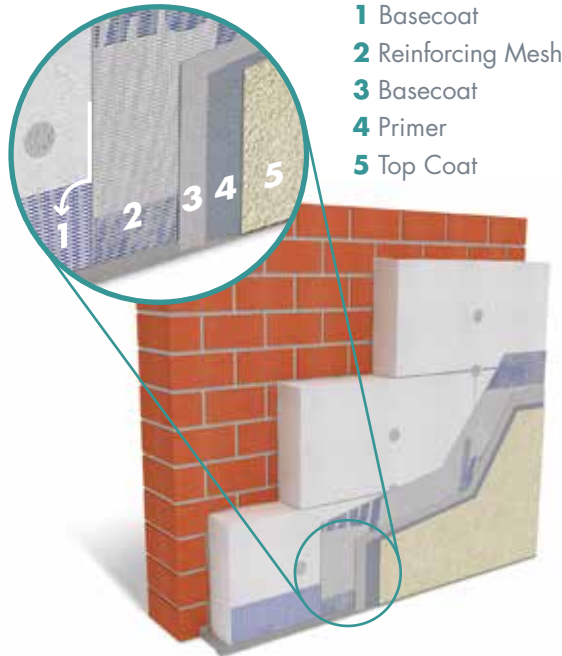

- 1 Basecoat
- 2 Reinforcing Mesh
- 3 Basecoat
- 4 Primer
- 5 Top Coat

Knauf SM300 – Basecoat

Knauf SM300 is a grey mineral adhesive and reinforcing basecoat mortar that offers high strength adhesion to masonry substrates. Knauf SM300 is for use on Knauf Warm Wall systems and is suitable as a reinforcing coat for EPS and mineral fibre insulation boards.



Knauf SM700 – Basecoat

Knauf SM700 is a grey mineral adhesive and reinforcing basecoat mortar. Knauf SM700 offers increased high strength adhesion, through additional fibre content, and is suitable as a reinforcing coat for EPS and mineral fibre insulation boards. Knauf SM700 can also be used as a reinforcing basecoat for masonry and cement carrier board substrates.



Knauf SM700 Pro – Basecoat

Knauf SM700 Pro is a white mineral adhesive and reinforcing basecoat mortar. Knauf SM700 Pro offers increased high strength adhesion through additional fibre content and is suitable as a reinforcing coat for EPS and mineral fibre insulation boards. Knauf SM700 Pro can also be used as a reinforcing basecoat for masonry and cement carrier board substrates.



Knauf Reinforcing Mesh

A polymer coated glassfibre reinforcing mesh. It is available in two types – 4 x 4mm and 5 x 5mm.



Knauf Quarzgrund Pro – Primer

Knauf Quarzgrund Pro is a ready-mixed bonding primer, which can be used on cement carrier boards before the application of basecoats such as Knauf SM300, Knauf SM700 and SM700 Pro. It can also be used as a bonding primer to go on top of Knauf Basecoats before the application of the finishing coat such as Knauf Noblo, Conni S and Addi S. Knauf Quarzgrund Pro is available in a wide range of colours to complement the chosen finishing coat.

